


PIM IGBT Module

电气特性:

- 1200V 沟槽栅/场终止工艺
- 低开关损耗
- 正温度系数

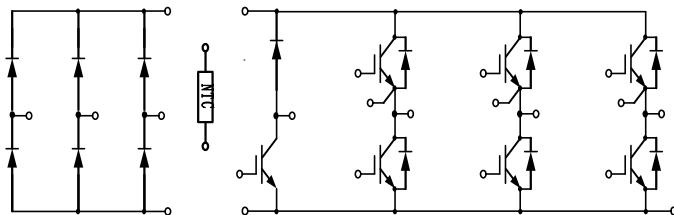

典型应用:

- 变频器
- 伺服
- 逆变器



$V_{CES} = 1200V$, $I_{C\text{ nom}} = 40A$ / $I_{CRM} = 80A$

IGBT, 逆变器 / IGBT, Inverter

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value		Unit
集电极-发射极电压 Collector-Emitter voltage	$T_{vj}=25^\circ C$	V_{CES}	1200		V
连续集电极直流电流 Continuous DC collector current	$T_C=100^\circ C$, $T_{vj\text{ max}}=175^\circ C$	$I_{C\text{ nom}}$	40		A
集电极重复峰值电流 Repetitive peak collector current	$t_p=1\text{ ms}$	I_{CRM}	80		A
栅极-发射极电压 Gate emitter voltage		V_{GE}	± 20		V

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
集电极-发射极饱和电压 Collector-Emitter saturation voltage	$V_{GE}=15V$, $I_c=40A$	V_{CEsat}		1.73	2.15	V
	$V_{GE}=15V$, $I_c=40A$			2.02		
	$V_{GE}=15V$, $I_c=40A$			2.04		
栅极-发射极阈值电压 Gate-Emitter threshold voltage	$I_c=1.5mA$, $V_{GE}=V_{CE}$	$V_{GE(th)}$	5.00	5.60	6.20	
栅电荷 Gate charge	$V_{GE}=-15V \dots +15V$	Q_G		0.33		μC

内部栅极电阻 Internal gate resistor		R _{Gint}		None		Ω
输入电容 Input capacitance	f=1MHz, V _{CE} =25 V, V _{GE} =0 V T _{vj} =25°C	C _{ies}		2.72		nF
反向传输电容 Reverse transfer capacitance		C _{res}		0.14		
集电极-发射极截止电流 Collector-emitter cut-off current	V _{CE} =1200V , V _{GE} = 0 V T _{vj} =25°C	I _{CES}			1	mA
栅极-发射极漏电流 Gate-emitter leakage current	V _{CE} =0 V, V _{GE} = 20 V T _{vj} =25°C	I _{GES}			100	nA
开通延迟时间 Turn-on delay time	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	t _{d on}		49 42 44	
上升时间 Rise time	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	t _r		55 57 57	ns
关断延迟时间 Turn-off delay time	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	t _{d off}		267 320 336	
下降时间 Fall time	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	t _f		148 226 245	
开通损耗能量 (每脉冲) Turn-on energy loss per pulse	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	E _{on}		3.47 4.94 5.65	mJ
关断损耗能量 (每脉冲) Turn-off energy loss per pulse	I _c =40A, V _{CE} =600 V V _{GE} =±15 V, R _G =20Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	E _{off}		2.07 2.92 3.17	
短路数据 SC data	V _{GE} ≤15V, V _{CC} =800V V _{CEmax} =V _{CES} -L _{sCE} ·di/dt t _p ≤8us, T _{vj} =150°C	I _{SC}		196		A
在开关状态下温度 Temperature under switching conditions		T _{vj op}	-40		150	°C

二极管, 逆变器 / Diode, Inverter

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
反向重复峰值电压 Repetitive peak reverse voltage	T _{vj} =25°C	V _{RRM}	1200	V
连续正向直流电流 Continuous DC forward current		I _F	30	A
正向重复峰值电流 Repetitive peak forward current	t _p =1ms	I _{FRM}	60	A
I ² t 值 I ² t-value	t _p =10ms, sin 180° , T _{vj} =125°C	I ² t	1560	A ² s

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	I _F =30A, V _{GE} =0V	V _F	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	2.05 1.71 1.61	2.60	V
	I _F =30A, V _{GE} =0V					
	I _F =30A, V _{GE} =0V					
反向恢复峰值电流 Peak reverse recovery current	I _F =30A, -di _F /dt=632A/μs(T _{vj} =150°C)	I _{RM}	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	28 43 47	A	A
	V _R =600V, V _{GE} =-15V					
	V _R =600V, V _{GE} =-15V					
恢复电荷 Recovered charge	I _F =30A, -di _F /dt=632A/μs(T _{vj} =150°C)	Q _r	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	2.39 5.90 7.21	μC	μC
	V _R =600V, V _{GE} =-15V					
	V _R =600V, V _{GE} =-15V					
反向恢复损耗 (每脉冲) Reverse recovered energy	I _F =30A, -di _F /dt=632A/μs(T _{vj} =150°C)	E _{rec}	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	0.81 1.99 2.42	mJ	mJ
	V _R =600V, V _{GE} =-15V					
	V _R =600V, V _{GE} =-15V					
在开关状态下温度 Temperature under switching conditions		T _{vj op}	-40		150	°C

二极管, 整流器 / Diode, Rectifier
最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value		Unit
反向重复峰值电压 Repetitive peak reverse voltage	T _{vj} =25°C	V _{RRM}	1600		V
反向不重复峰值电压 Non-Repetitive peak reverse voltage	T _{vj} =25°C, I _{RRM} =5μA	V _{RSM}	2000		V
最大正向平均电流 Maximum Average Forward Current		I _{F(AV)}	30		A
正向浪涌电流 Surge forward current	t _p =10ms, sin180°, T _{vj} =25°C	I _{FSM}	360		A
I ² t 值 I ² t-value	t _p =10ms, sin180°, T _{vj} =125°C	I ² t	648		A ² s

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	I _F =30A, T _j =25°C	V _F			1.2	V
反向电流 Reverse current	V _R =V _{RRM}	I _R			5	μA
在开关状态下温度 Temperature under switching conditions		T _{vj op}	-40		150	°C

IGBT, 制动-斩波器 / IGBT, Brake-Chopper

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value		Unit
集电极-发射极电压 Collector-Emitter voltage	$T_{vj}=25^\circ C$	V_{CES}	1200		V
连续集电极直流电流 Continuous DC collector current	$T_C=100^\circ C, T_{vj\ max}=175^\circ C$	$I_{C\ nom}$	25		A
集电极重复峰值电流 Repetitive peak collector current	$t_p=1\ ms$	I_{CRM}	50		A
栅极-发射极电压 Gate emitter voltage		V_{GE}	± 20		V

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
集电极-发射极饱和电压 Collector-Emitter saturation voltage	$V_{GE}=15V, I_c=25A$ $V_{GE}=15V, I_c=25A$ $V_{GE}=15V, I_c=25A$	V_{CEsat}	25°C 125°C 150°C	1.97	2.40	V
栅极-发射极阈值电压 Gate-Emitter threshold voltage	$I_c=1mA, V_{GE}=V_{CE}$			5.10	5.70	
栅电荷 Gate charge	$V_{GE}=-15V \dots +15V$			Q_G	0.18	
内部栅极电阻 Internal gate resistor		R_{Gint}		None		Ω
输入电容 Input capacitance	$f=1MHz, V_{CE}=25\ V, V_{GE}=0\ V$	C_{ies}	25°C	1.65		nF
反向传输电容 Reverse transfer capacitance				C_{res}	0.08	
集电极-发射极截止电流 Collector-emitter cut-off current	$V_{CE}=1200V, V_{GE}=0\ V$	I_{CES}			1	mA
栅极-发射极漏电流 Gate-emitter leakage current	$V_{CE}=0\ V, V_{GE}=20\ V$	I_{GES}			100	nA
开通延迟时间 Turn-on delay time	$I_c=25A, V_{CE}=600\ V$ $V_{GE}=\pm 15\ V, R_G=68\Omega$ (电感负载) / (inductive load)	$t_{d\ on}$	25°C 125°C 150°C	112		ns
上升时间 Rise time	$I_c=25A, V_{CE}=600\ V$ $V_{GE}=\pm 15\ V, R_G=68\Omega$ (电感负载) / (inductive load)			97		
关断延迟时间 Turn-off delay time	$I_c=25A, V_{CE}=600\ V$ $V_{GE}=\pm 15\ V, R_G=68\Omega$ (电感负载) / (inductive load)			96		
下降时间 Fall time	$I_c=25A, V_{CE}=600\ V$ $V_{GE}=\pm 15\ V, R_G=68\Omega$ (电感负载) / (inductive load)	$t_{d\ off}$	25°C 125°C 150°C	102		ns
开通损耗能量 (每脉冲) Turn-on energy loss per pulse	$I_c=25A, V_{CE}=600\ V$ $V_{GE}=\pm 15\ V, R_G=68\Omega$			105		
				422		
				460		
				470		
				187		
				262		
				282		
				3.75		mJ
				4.67		

	(电感负载) / (inductive load)	T _{vj} =150°C			5.02	
关断损耗能量 (每脉冲) Turn-off energy loss per pulse	I _c =25A, V _{CE} =600V V _{GE} =±15V, R _G =68Ω (电感负载) / (inductive load)	T _{vj} =25°C T _{vj} =125°C T _{vj} =150°C	E _{off}		1.83 2.28 2.45	
在开关状态下温度 Temperature under switching conditions		T _{vj op}	-40		150	°C

二极管，制动-斩波器 / Diode, Brake-Chopper

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value		Unit
反向重复峰值电压 Repetitive peak reverse voltage	T _{vj} =25°C	V _{RRM}	1200		V
连续正向直流电流 Continuous DC forward current		I _F	15		A
正向重复峰值电流 Repetitive peak forward current	t _p =1ms	I _{FRM}	30		A
I ² t 值 I ² t-value	t _p =10ms, sin180°, T _{vj} =125°C	I ² t	120		A ² s

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	I _F =15A, V _{GE} =0V	V _F		2.32	2.70	V
	I _F =15A, V _{GE} =0V			1.80		
	I _F =15A, V _{GE} =0V			1.69		
反向恢复峰值电流 Peak reverse recovery current	I _F =15A, -dI _F /dt=189A/μs(T _{vj} =150°C)	I _{RM}	T _{vj} =25°C	8		A
	V _R =600V, V _{GE} =-15V		T _{vj} =125°C	12		
			T _{vj} =150°C	14		
恢复电荷 Recovered charge	I _F =15A, -dI _F /dt=189A/μs(T _{vj} =150°C)	Q _r	T _{vj} =25°C	1.25		μC
	V _R =600V, V _{GE} =-15V		T _{vj} =125°C	2.75		
			T _{vj} =150°C	3.58		
反向恢复损耗 (每脉冲) Reverse recovered energy	I _F =15A, -dI _F /dt=189A/μs(T _{vj} =150°C)	E _{rec}	T _{vj} =25°C	0.40		mJ
	V _R =600V, V _{GE} =-15V		T _{vj} =125°C	0.90		
			T _{vj} =150°C	1.21		
在开关状态下温度 Temperature under switching conditions		T _{vj op}	-40		150	°C

负温度系数热敏电阻 / NTC-Thermistor

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
额定电阻值 Rated resistances	T _c =25°C, ± 5%	R ₂₅		5.0		KΩ
B-值 B-value	±2%	B _{25/50}		3375		K

模块 / Module

Parameter	Conditions	Symbol	Value			Unit
绝缘测试电压 Isolation test voltage	RMS, f=50Hz, t=1min	V _{ISOL}	2500			V
内部绝缘 Internal isolation			Al ₂ O ₃			
储存温度 Storage temperature		T _{stg}	-40		125	°C
模块安装的扭矩 Mounting torque for modul mounting		M	3.0		6.0	Nm
重量 Weight		W		42		g

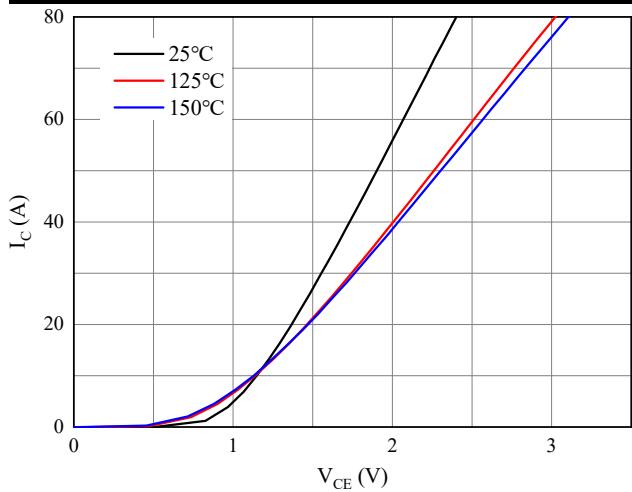


图 1. 典型输出特性 ($V_{GE}=15V$)

Figure 1. Typical output characteristics ($V_{GE}=15V$)

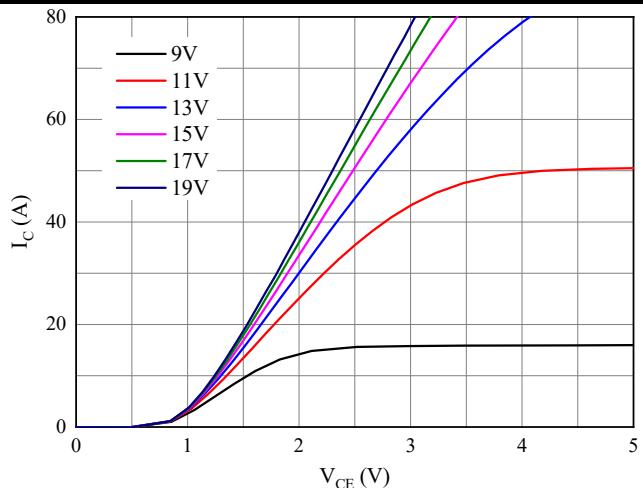


图 2. 典型输出特性 ($T_{vj}=150^{\circ}C$)

Figure 2. Typical output characteristics ($T_{vj}=150^{\circ}C$)

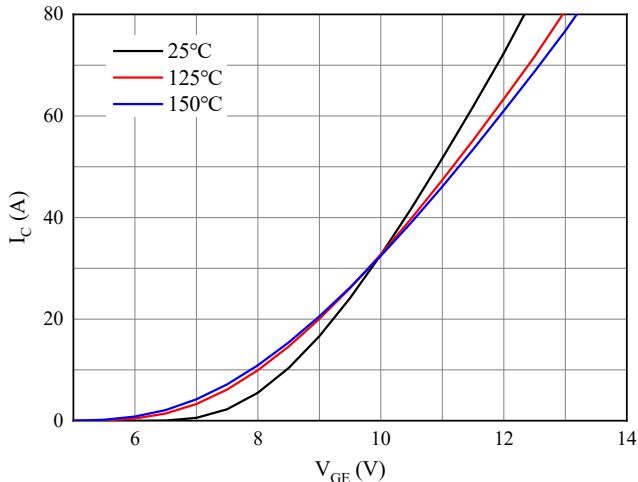


图 3. 典型传输特性($V_{CE}=20V$)

Figure 3. Typical transfer characteristic($V_{CE}=20V$)

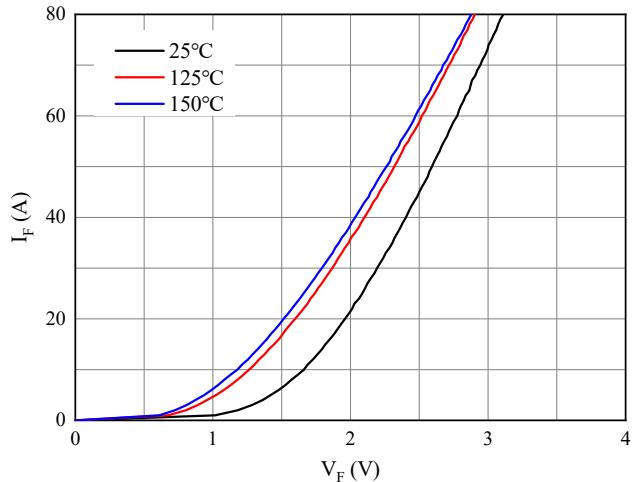


图 4. 正向偏压特性 二极管

Figure 4. Forward characteristic of Diode

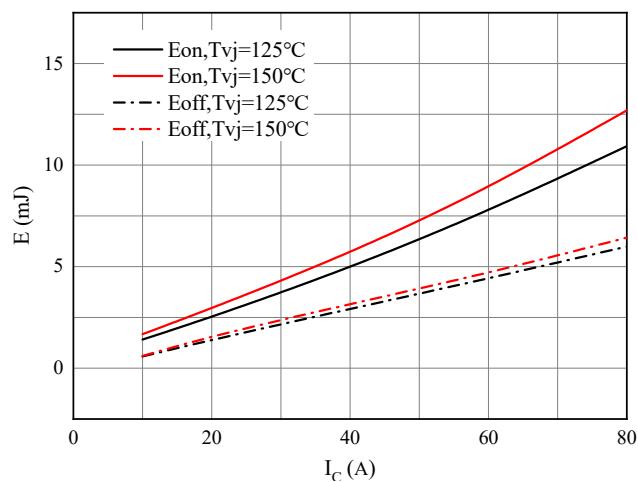


图 5. 开关损耗 逆变器

Figure 5. Switching losses of IGBT
 $V_{GE}=\pm 15V$, $R_{Gon}=20\Omega$, $R_{Goff}=20\Omega$, $V_{CE}=600V$

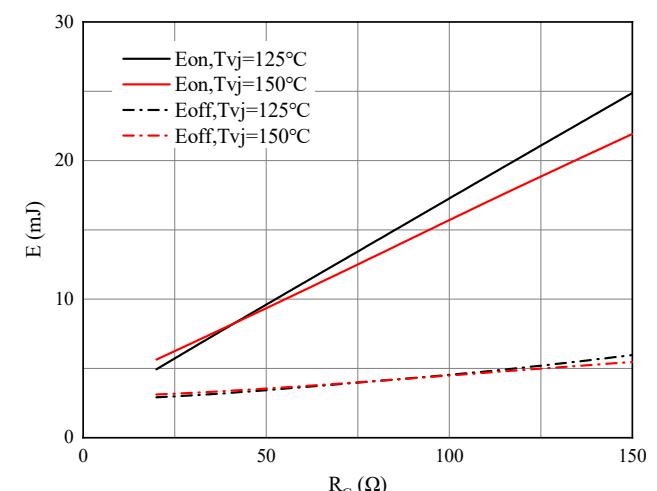


图 6. 开关损耗 逆变器

Figure 6. Switching losses of IGBT
 $V_{GE}=\pm 15V$, $I_C=40A$, $V_{CE}=600V$

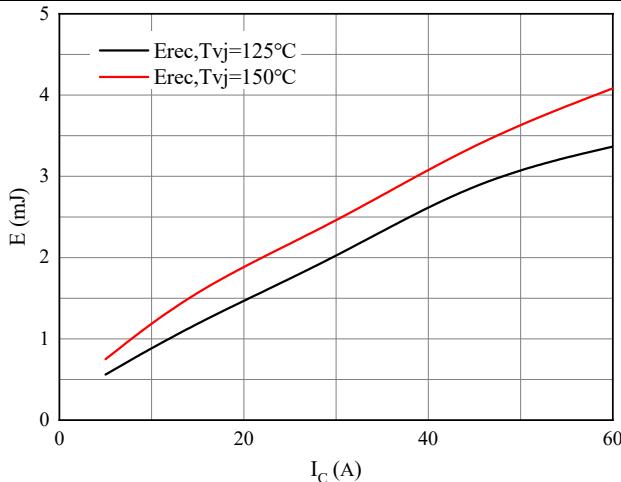


图 7. 开关损耗 二极管

Figure 7. Switching losses of Diode
RGon=68Ω, VCE=600V

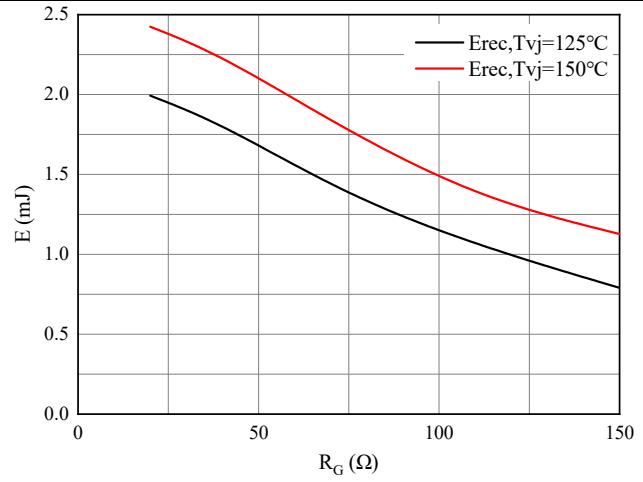


图 8. 开关损耗 二极管

Figure 8. Switching losses of Diode
IF=30A, VCE=600V

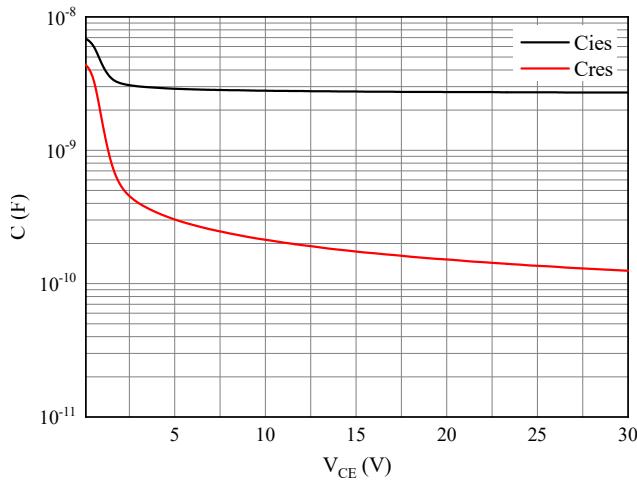


图 9. 电容特性

Figure 9. Capacitance characteristic


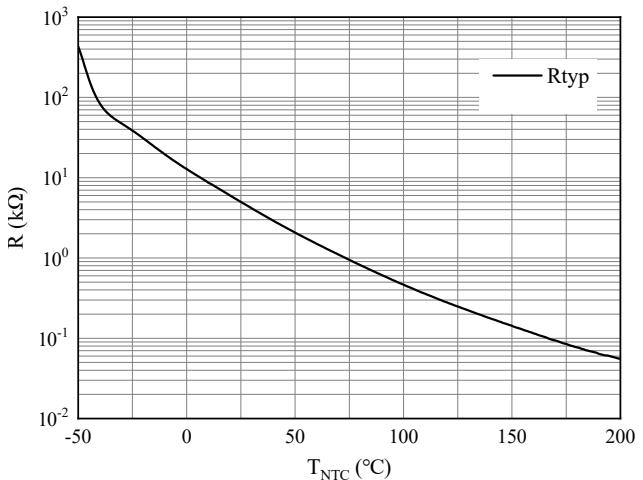


图 10. 负温系数热敏电阻 温度特性

Figure 10. NTC-Thermistor-temperature characteristic

接线图 / Circuit diagram

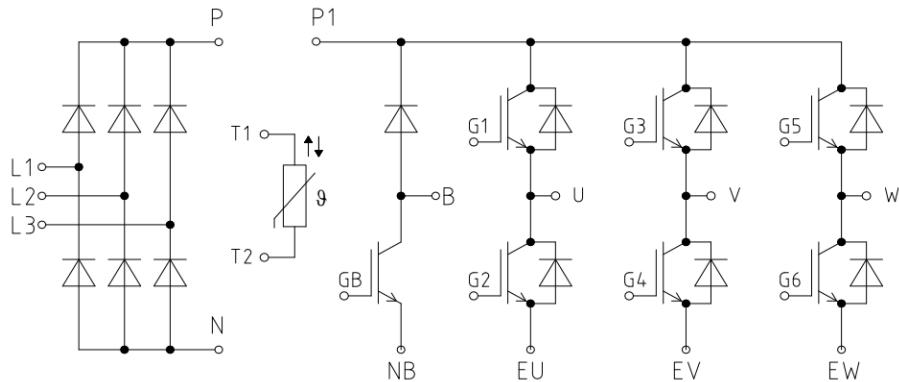

封装尺寸 / Package outlines

